REF: 2650 TELA FIBRA DE VIDRIO PTFE (1 LADO)

REF: FCF1650 FIBERGLASS CLOTH WITH PTFE ONE SIDE

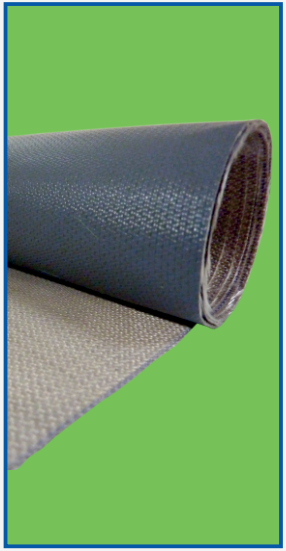

DESCRIPCIÓN: tejido de fibra de vidrio se somete en una cara a un proceso de laminación con PTFE para conformar una tela antiadherente químicamente inerte resistente a la mayoría de productos químicos excepto a los alcalinos derretidos.

APLICACIONES: Se emplea como banda transportadora en sistemas secos, como sistema antiadherente en procesos de sellado y procesos de termoformado, como protector contra agentes químicos y como cubierta protectora en chaquetas aislantes removibles.

TOLERANCIA: Kg/Mt +/-10%. **ESPESOR:**+/- 0.003"

DESCRIPTION: glass fiber fabric is coated with 100% PTFE. to form a non-stick material, inert chemically, resistent to most chemicals except molted alkali.

APPLICATIONS: Used as a band dry conveyor systems, nonstick sealing processes and thermoforming, as protective agents against chemical, as cover removable in protective insulating jackets.

TOLERANCE: Kg/Mt +/-10%. **THICKNESS:**+/- 0.003"

Thickness mm(inches)	Weight Kg/Mt²	Width Mts	Meters / Roll	Temperature ° C
0.38 (0.015")	0.6	1.5	45.0	-78 ºC to 316 ºC